

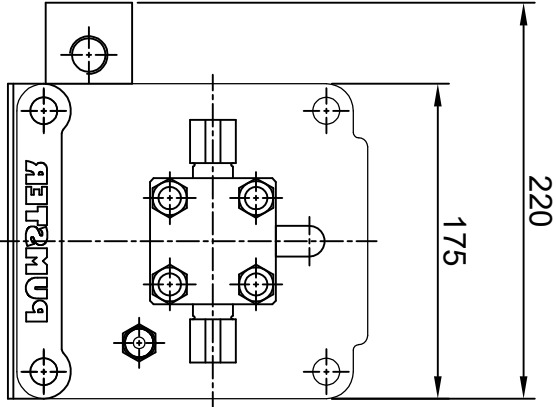


Liquid Pump Specification

모델명	LSS-50, 80, 150, 220, 350
증압가능한 Liquid	물
구동 Air 압력	7~10 bar
최대 증압 (Bar)	350, 560, 1050, 1540, 2450
실린더 체적 (L)	0.02, 0.01, 0.01, 0.01, 0.01
운할(그리스)	산소그리스 : TECHLUB 6F 7002 (특브릭)
	일반그리스 : LA1720SK1 (GS칼텍스)
	나노그리스 : FLUX-BL-A2 (80이올릭스)
무게(kg)	12, 12, 12, 12, 12

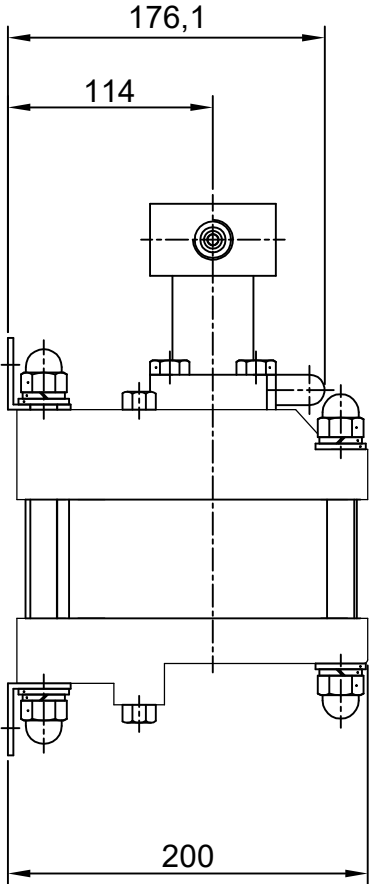

입출력부/모델	LSS - 50	LSS - 80	LSS - 150	LSS - 220	LSS - 350
Liquid 입력부	PT 1/2" (F)	PT 1/2" (F)	PT 1/2" (F)	PT 1/2" (F)	PT 1/2" (F)
Liquid 출력부	PT 1/2" (F)	9/16"-18UNF (F)	9/16"-18UNF (F)	9/16"-18UNF (F)	9/16"-18UNF (F)

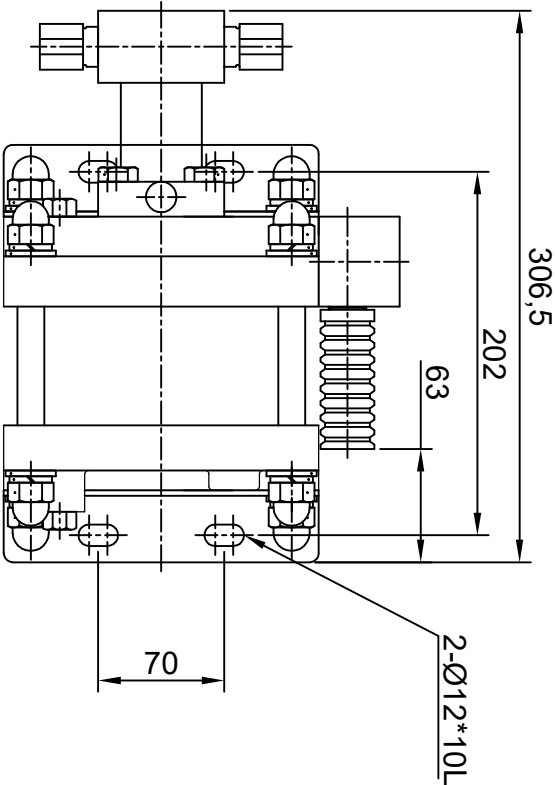

PRODUCT LIQUID PUMP

CLIENT

ISSUE DATE 2024. 09. 02.

TITLE LSS 시리즈

리퀴드펌프

APPRO BY

DATE 2024. 09. 02.

REVISION NO.

REVISION NO.

REVISION NO.

NO.	FOR APPROVAL	DATE	REVISION	DATE	REVISION	DATE	REVISION	DATE	REVISION	DATE	REVISION
1	FOR APPROVAL	2024. 09. 02.	1	FOR APPROVAL	2024. 09. 02.	1	FOR APPROVAL	2024. 09. 02.	1	FOR APPROVAL	2024. 09. 02.